



MASSEY FERGUSON

74-100 HP



MF 47/5700

Massey Ferguson Global Series



Contents

3	Global Series	8	Shuttle Options
4	New workhorses of the world	9	Linkages and Axles
5	Easy on the operator	10	Product Features
6	Engines	11	Specifications
7	Transmission		

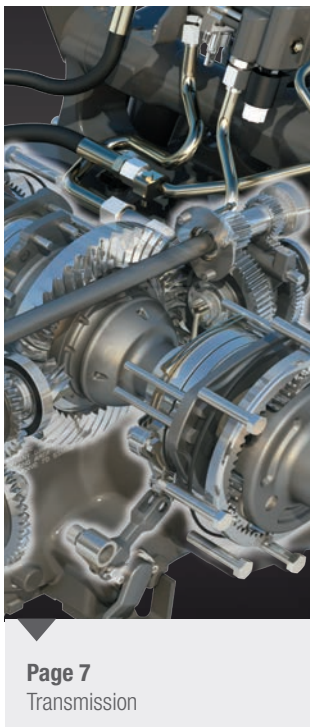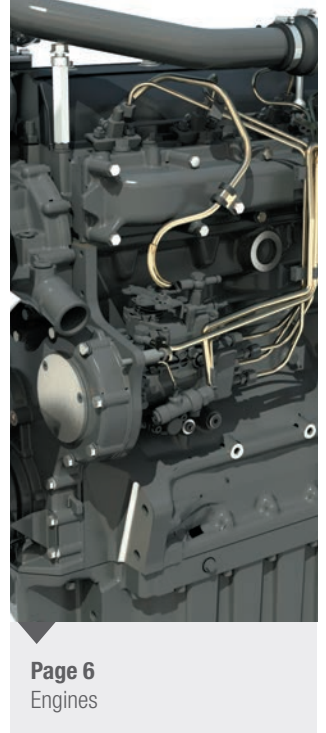



Global Series

Since the inception of the brand, Massey Ferguson has produced more than four million tractors in the 74 – 100 hp bracket. It's a power sector that once represented the largest tractors available, yet now accounts for a size of machine found in almost every farming operation around the world. Suitable for a multitude of tasks throughout Australia and New Zealand, and tailored to meet your specific requirements, these are the tractors the world's farmers depend on day in, day out – the new Massey Ferguson Global Series.

A New Tractor for a New World

Massey Ferguson's resilient utility tractors have been built to service Australia and New Zealand's farming communities. Designed from the ground up, these world-class Global Series tractors can handle our rich agricultural landscape with

proficiency and ease. Manufactured to exact standards, Massey Ferguson Global Series tractors are built in the latest high-technology facilities to ensure farmers experience an unbeatable performance, every day.

The new workhorses of the world

With the new Global Series, Massey Ferguson has taken the concept of a utility tractor and re-engineered it from the ground up to meet the needs of present and future farming. On offer in this power bracket is an array of build specifications, options and accessories, all designed to help tailor your machine exactly the way you need it for your farming operation.

In-built reliability, integral dependability

Massey Ferguson engineers have farming in their blood. They know exactly how crucial it is that a tractor meets the challenges that nature can put in the way of any farming activity. So whether it's making the most of short weather windows to complete jobs in the field, or battling through the elements to ensure livestock are looked after, these are machines that can be relied on all year round, in all weathers, in all environments. With the Global Series each component and every assembly has been designed to ensure rock-solid reliability and dependable operation.




Easy on the operator

To ensure customers have the most suitable option for their operation, there are two specification variants, Standard and Essential, available on all Global Series tractors.

A specification for every need

Two variants are available, offering a simple, cost effective base option for customers wanting the minimum options for low-hour operation and a more advanced option for customers wanting improved comfort, functionality and ease of operation for longer operating hours.

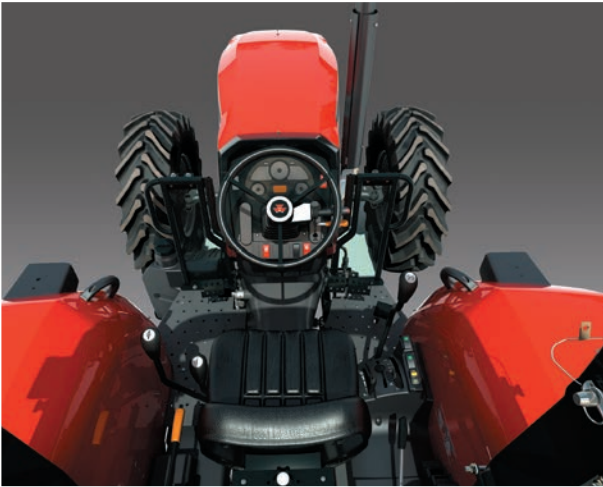

Standard Variant*

- ▶ Footstep operator's station with side mounted gear selectors
- ▶ Platform mounted pedals
- ▶ Mechanical Clutch
- ▶ Mechanical Synchronised forward/reverse shuttle located to the left of the operator
- ▶ Mechanical brakes

* MF 4700 Series only



Essential Variant

- ▶ Semi-platform operator's station with side mounted gear selectors
- ▶ Pendant pedals
- ▶ Power Control Lever with comfort control and wet clutch
- ▶ Hydraulic brakes
- ▶ Flat platform
- ▶ Declutch button on gear lever for clutchless gear changes



Essential Variant Cabin*

- ▶ Air suspension swivel seat
- ▶ Tilt and reach adjustable steering column
- ▶ Ergonomic layout with B-pillar ignition and controls
- ▶ Curved rear quarter windows for superior visibility
- ▶ External linkage control on both sides


* MF 5700 Series only





Engines

Global Series tractors are powered by AGCO POWER engines specifically designed for Massey Ferguson, so you can be sure that product quality, compatibility and efficiency are of a very high standard.

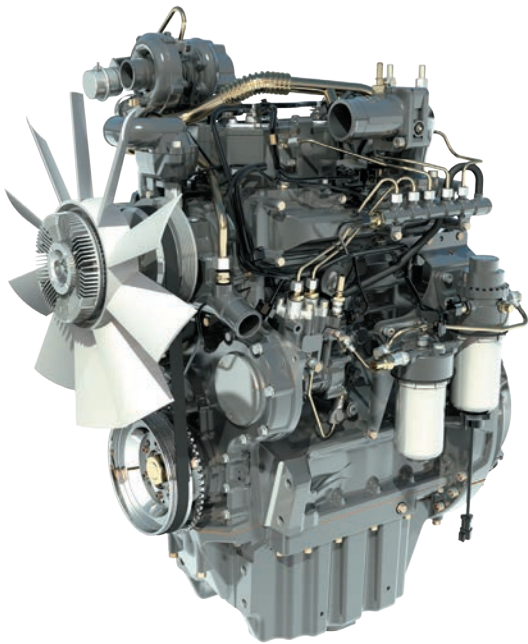

MF 4708 / MF 5709 / MF 5710

The muscle to tackle any task

For proven reliability, ruggedness and fuel economy, a 4.4-litre AGCO POWER four-cylinder engine is core to the MF 4708 and MF 5700 Series models providing up to 410 Nm of torque at 1,500 rpm.

Meagre on fuel, low on noise

The engines used in the Global Series tractors are all of a long stroke design that provides high levels of torque across a broad speed range. Maximum torque is achieved at a low engine speed of 1,500 rpm on both models. With a low rated engine speed of only 2,200 rpm, not only is diesel use minimised, but so too are both noise and wear and tear, resulting in lower fuel bills and a more pleasant operator experience.

MF 4707


Proven power, perfect package

Renowned for compact, proven power and fuel efficient reliability, a 3.3-litre AGCO POWER three-cylinder engine is at the core of the 74 hp Massey Ferguson 4707 model, providing 296 Nm of torque at 1,500 rpm.





Transmission

The Massey Ferguson Global Series tractors feature all new synchromesh transmissions. With six automotive-style synchronised gears and a synchronised low to high range change, the total of twelve forward and twelve reverse speeds provide unmatched flexibility and easy use.

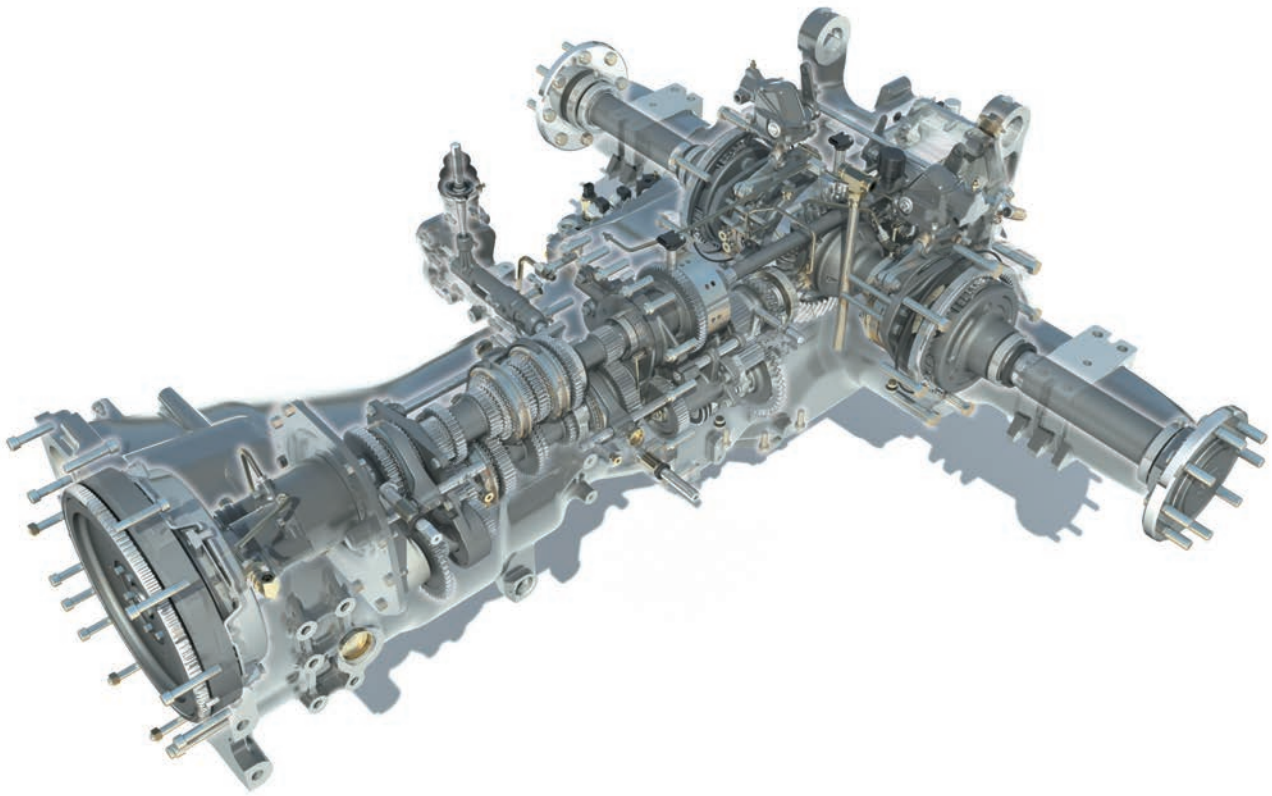

Easy gear selection for the right gear for every job

With six synchromesh gears in each range, the right speed for each job is easily selected using gear levers mounted beside the operator. These are within easy reach, yet positioned to ensure an unimpeded passage when mounting and dismounting.

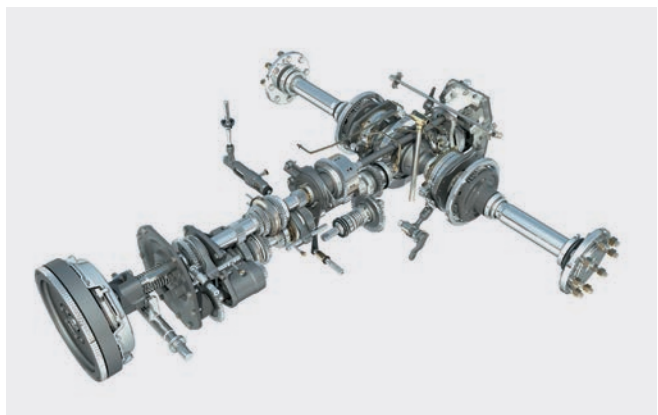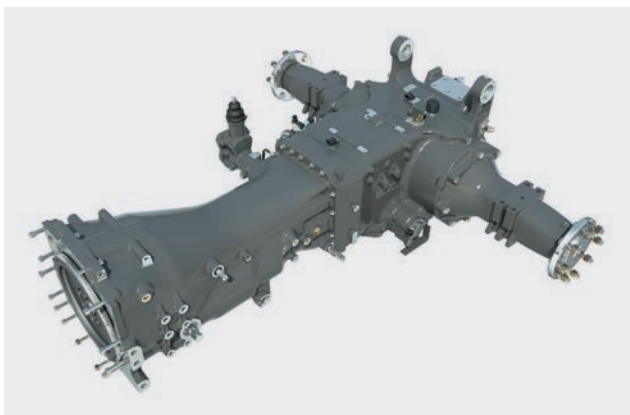

Shuttle Options

Moving between forward and reverse for loader work, field headlands or even hooking up implements, is made easier with a variety of forward/reverse shuttle options.



Standard Variants*

Synchronised mechanical forward and reverse shuttle

Fitted to all Standard Variants is a simple, yet exceptionally easy to use synchronised mechanical forward and reverse shuttle located to the left of the operator's seat. Clutch operation is a simple and effective mechanical dry-plate type giving great functionality in a cost effective package.

*MF 4700 Series only.



Essential Variants – power shuttle

Forward to reverse as quickly as you like


For the ultimate in forward and reverse shuttle operation, the Essential Variant is available with the Massey Ferguson Power Control Lever. Similar in design and operation to the Power Control Lever featured on Massey Ferguson products such as the MF 7700 and MF 8700, the new Power Control Lever is located to the left of the steering column and features Comfort Control to alter the aggressiveness of the direction change.

Functions include:

- Clutchless forward and reverse shifting
- Speed of direction change can be altered through the Comfort Control dial
- Declutch by lifting the handle to enable gear changes without the clutch pedal

Coupled with a multi-plate wet clutch and the 12x12 synchromesh transmission, this gives the operators a highly flexible and easy to use system designed for operations such as loader work where frequent changes of direction are required.


Linkages and Axles

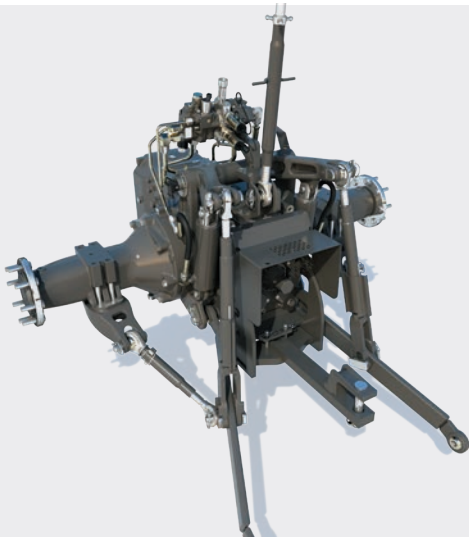

Power any implement

There is no limit to the range of powered equipment that can be put to work behind the Global Series tractors. All are fitted with a 35 mm/six-spline PTO shaft providing a 540 rpm PTO speed and protected by an independent PTO clutch (IPTO). 540/540E is base on all Global Series Essential Variants.

The gear pump open centre hydraulic system produces 65 l/min for the MF 4700 Series and 98 l/min for the MF 5700 Series. This also supplies the electronic controlled rear-linkage to give a lift capacity of 3,300 kg for the MF 4700 Series and 4,500 kg for the MF 5700 Series.

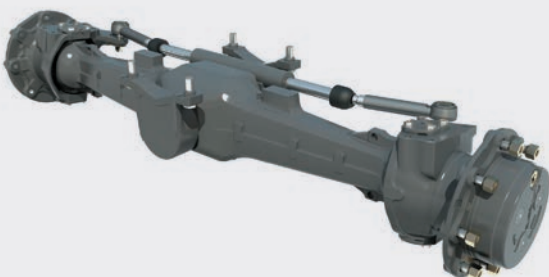

In total control

Base on all models, the 4WD front axles feature a 55° maximum steering angle, making the machines very manoeuvrable and easy to use in confined spaces. Standard Variants feature a limited slip differential, while Essential have an electro-hydraulic differential lock.

Product Features

1. 4 cylinder or 3 cylinder AGCO POWER Engine
2. 12 x 12 synchronesh transmission with synchronised shuttle
3. Pivoting front bonnet
4. Footstep or Semi Platform or Operator Station
5. 4WD front axles
6. Electro-hydraulically engaged rear differential lock and 4WD
7. Electronic Linkage Control (ELC)
8. 540 or 540/540E rpm Independent PTO
9. Two Auxiliary spool valves
10. Gear Driven Open Centre Hydraulic System
11. Folding ROPS with optional steel canopy or air conditioned cabin*

* MF 5700 Series only.




Supported worldwide by AGCO and Massey Ferguson

Massey Ferguson dealers can be found in significant numbers in almost every country across the globe. They are run by trained staff who know Massey Ferguson machines inside out, and are able to provide advice, parts, service and support whenever required to keep your Global Series tractor running at its optimum. And they are backed by the resources of AGCO, parent company of Massey Ferguson and a world leader in farm equipment. So wherever you farm in the world, you can be sure that your Massey Ferguson Global Series tractor will be supported by the best team in the business of farm equipment.



Specifications

	MF 4707ST	MF 4708ST	MF 4707ES	MF 4708ES	MF 5709ES	MF 5710ES
VARIANTS	STANDARD		ESSENTIAL			
Engine Performance						
Engine hp (kW) power ISO hp(kW)	74 (55)	82 (61)	74 (55)	82 (61)	92 (68)	102 (76)
Max torque at 1,500 rpm (Nm)	296	342	296	342	380	410
Rated engine speed (rpm)	2,200					
Engine						
Engine Type	AGCO POWER AP33	AGCO POWER AP44	AGCO POWER AP33	AGCO POWER AP44		
No. of Cylinders	3	4	3	4		
Capacity (cc)	3,300	4,400	3,300	4,400		
Aspiration	Turbo Charged					
Transmission						
12 x 12 Synchro	Standard / Optional 24 x 24 with creep					
Shuttle operation	Left hand side shift		Left hand console mounted			
Clutch type	Single Dry Plate Clutch		Multi-Plate Wet Clutch			
Clutch operation	Mechanical		Hydraulic			
Power Take-off						
Independent PTO	540		540 / 540 E		540 / 540 E & optional 540 / 1000	
Steering						
Hydrostatic	Base					
Hydraulics						
3-point linkage control	Lever operated ELC		Lever operated ELC with draft control			
Max lift capacity (kg)	3,300			4,500		
Auxillary (litres/min)	65			98		
System pressure (bar)	200					
Spool Valves						
Auxillary	2 Valves Standard / 3 Valves Optional					
Brakes						
Type	Oil immersed multi disc wet brakes					
Weights and Capacities						
Weight without ballast – Footstep (kg) 4WD	3,300			4,070 (cabin models) 3,700 (ROPS models)		
Fuel tank (litres)	82		105		170	
Wheel Equipment						
Trelleborg Radial Tyres	460/85 R30		340/85 R24		460/85R34 380/85R24	

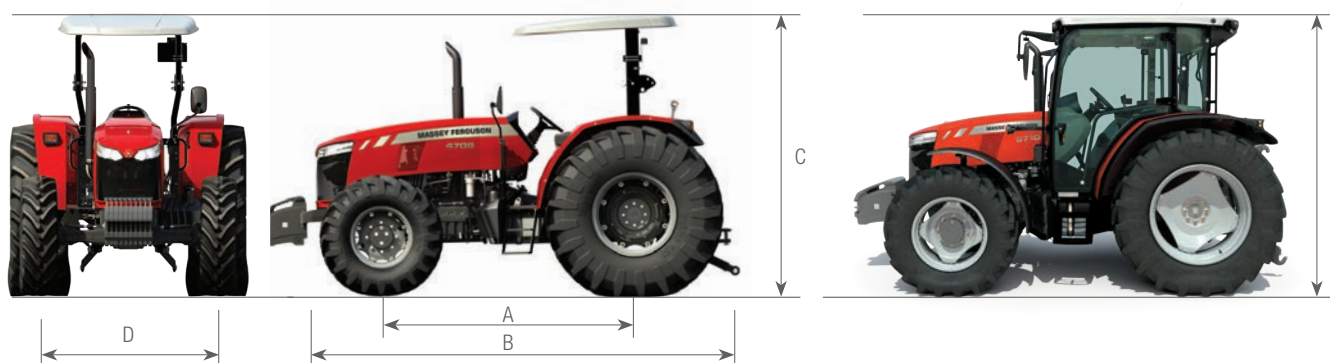

	MF 4707	MF 4708	MF 5709	MF 5710
Dimensions				
A - Wheelbase - mm	2,250	2,358	2,430	
B - Overall length from front weight frame to rear linkage arms - mm	4,066	4,175	4,305	
C - Height to top of canopy/cabin - mm	2,572	2,572	2,775/2,735	
D - Track width - mm	1,297 to 1,848			
E - Height to top of cabin - mm	2,735 [for 5709 and 5710]			

For even greater productivity a range of optional equipment is available including front weights, rear-wheel weights, ROPS Canopy. For full details please consult your local Massey Ferguson dealer.

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



MASSEY FERGUSON

A world of experience. Working with you.



facebook.com/MasseyFergusonGlobal
twitter.com/AGCOcorp
youtube.com/MasseyFergusonVideo
blog.agcocorp.com

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



Your Agriculture Company

MASSEY FERGUSON is a worldwide brand of AGCO.